



**Multi-Port LTE-A Pro
Rugged Vehicle Router
for Public Safety Fleets
and Industrial IoT**

MP70 Product Description

The AirLink® MP70 with a single LTE radio and dual-band gigabit Wi-Fi, enables live video streaming and secure access to remote databases, and delivers connectivity for laptops, tablets, DVRs, and vehicle telemetry.

AIRLINK MP70 LTE-A PRO

Rugged Cat-12 LTE router capable of 600 Mbps downlink and 150 Mbps uplink speeds. FirstNet® Ready. Wi-Fi optional.

Ideal Applications

Mobile mission-critical applications in public safety and field services. Enables robust and secure Vehicle Area Networks (VANS) for:

- Ambulance/EMS
- Law Enforcement
- Fire
- Utility Vehicles
- Multi-ethernet industrial and IoT applications

Benefits

- Proven solution: Leading U.S. police departments rely on AirLink routers in cruisers and incident response vehicles
- Video, voice and data applications all work together - when and how you need them
- Work further and faster from the vehicle than ever before
- Supports Private Networking
- Remote device management through AirLink Complete

MP70 Services and Support



AIRLINK COMPLETE

Maximize your AirLink MP70 hardware investment with AirLink Complete – a comprehensive service package designed to empower you with the tools and support necessary to secure, optimize and effortlessly scale your MP70 deployments.

AirLink Complete includes*:

- **AirLink Management Service (ALMS)** for remote device and security management
- **Expert technical support**
- **Extended hardware warranty** – up to 5 years maximum
- For more information on AirLink Complete visit our [web page](#)

**With active subscription. 1-year subscription included with the MP70 purchase*



AIRLINK PREMIUM

Ideal for organizations managing mission-critical vehicle fleets, this service upgrade encompasses all the benefits of [AirLink Complete](#)*, enhanced with:

- **Advanced Mobility Reporting***: Offers comprehensive coverage and fleet reporting to monitor your network and vehicles.
- **Advance Replacement***: Provides same-day shipping for in-warranty router replacements, minimizing downtime, spare inventory and keeping your operations running smoothly.

**With active subscription.*



ANTENNAS

- Tested and certified to provide guaranteed performance with all AirLink routers
- Accelerate deployment with always-on, end-to-end connectivity
- For more information on antennas specific to the MP70 router visit our [web page](#)

AirLink MP70 – Router Specifications

CELLULAR	
Peak D/L	Up to 600 Mbps, Cat 12
Peak U/L	Up to 150 Mbps
4G LTE	
Frequency Bands	
NAM	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, CBRS B48, B66
Global	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66
Public Safety Bands	
NAM	Band 14 (United States), FirstNet®
Global	Band 26, 28
3G WCDMA/HSPA+	
Frequency Bands	
NAM	B1, B2, B4, B5, B6, B8, B9, B19
Global	B1, B2, B4, B5, B6, B8, B9, B19

APPROVALS	
Regulatory	
NAM	FCC, PTCRB, IC/ISED
Global	CE, GCF, RED, RCM
Carrier*	
NAM	AT&T, Verizon, T-Mobile, Rogers, Telus, Southern Linc
Global	Telstra
PART NUMBERS	
NAM	1104071, 1104073 (3x3 Wi-Fi 1.3Gbps)
Global	1104072, 1104074 (Wi-Fi)
HOST INTERFACES	
4 Gigabit RJ-45 Ethernet ports RS-232 serial port (DB-9) USB 2.0 Micro-B Connector 3 SMA antenna connectors (cellular, diversity, GNSS) Active GNSS antenna support	
SECURITY	
Remote Authentication (LDAP, RADIUS, TACACS+) DMZ Inbound and Outbound Port filtering Inbound and Outbound Trusted IP MAC Address Filtering PCI compatible Secure Firmware Update FIPS 140-2	

* For carrier specific band support please refer to the hardware user guide.

AirLink MP70 – Router Specifications

SATELLITE NAVIGATION (GNSS)		SERIAL	
	Dedicated GNSS Receiver supporting GPS, GLONASS, BeiDou, Galileo Tracking Sensitivity: -162 dBm Reports: NMEA 0183 V3.0, TAIP, RAP, XORA Multiple Redundant Servers Reliable Store and Forward Inertial Navigation Sensors (Accelerometer and Gyro)		TCP/UDP PAD Mode Modbus (ASCII, RTU, Variable) PPP DNP3 Interoperability
WI-FI (OPTIONAL)		NETWORK AND ROUTING	
	Dual Band 2.4/5GHz Wi-Fi 802.11 b/g/n/ac with support for 128 clients WPA2 Enterprise High output power Simultaneous AP/Client Mode WiFi as WAN Mode (Multiple SSIDs, Captive Portal)	Throughput	140 Mbps Firewall TCP throughput
LAN (ETHERNET/USB)		Features	Network Address Translation (NAT) Reliable Static Route Port Forwarding Dynamic DNS Policy Routing Verizon PNTM NEMO/DMNR IPV6 Gateway VRRP
	DHCP Server IP Passthrough VLAN Host Interface Watchdog PPPoE	VPN	
ENVIRONMENTAL			IPsec, GRE, and OpenVPN Client Up to 5 concurrent tunnels Split Tunnel Dead Peer Detection (DPD)
Temperature	Operating Temperature: -30°C to +70°C / -22°F to +158°F Storage Temperature: -40°C to +85°C / -40°F to +185°F Humidity: 95% RH @ 60°C	ROUTER MANAGEMENT INTERFACES	
	Military Spec MIL-STD-810G conformance to shock, vibration, thermal shock, and humidity IP64 rated ingress protection		Local web user interface AT Command Line Interface (Telnet/SSH/Serial) SNMP SMS Commands
POWER		APPLICATION FRAMEWORK	
Input/Operating Voltage	7 to 36 VDC		ALEOS Application Framework (AAF) Lua Scripting Language
Power modes	Low voltage disconnect to prevent battery drain Built-in protection against voltage transients including 5 VDC engine cranking and +200 VDC load dump Ignition Sense with time delay shutdown	EVENTS ENGINE	
INPUT/OUTPUT			Custom event triggers and reports Configurable interface, no programming Event Types: Digital Input, Network Parameters, Data Usage, Timer, Power, Device Temperature and Voltage Report Types: RAP, SMS, Email, SNMP Trap, TCP (Binary, XML, CSV) Event Actions: Drive Relay Output
	Configurable I/O (5 pins total) • 5 Digital Inputs: ON Voltage: 2.7 to 36 VDC • 1 Digital Open Collector Output > sinking 500 mA • 3 Analog Inputs: 0.5-36 VDC • Configurable Pull-ups for dry contact input	INDUSTRY CERTIFICATIONS	
		Safety	IECEE Certification Bodies Scheme (CB Scheme), UL60950
		Vehicle Usage	E-Mark (UN ECE Regulation 10.04), ISO7637-2, SAE J1455 (Shock, Vibration, Electrical)
		Environmental	RoHS2, REACH, WEEE
		Rail Usage	EN50155 (Rolling Stock)

AirLink MP70 – Router Specifications

AIRLINK COMPLETE (1 Year Included With Router Purchase)	
Support	24/7 technical support*
Hardware Warranty	1-year standard hardware warranty Extended hardware warranty up to 5 years with current subscription**
Device Management	AirLink Management Service (ALMS)*
Software Updates	Unrestricted critical firmware updates through at least December 31st, 2029
AIRLINK PREMIUM (Optional Upgrade)	
Includes All Airlink Complete Features* and Adds:	
Advanced Mobility Reporting	Coverage and fleet reporting***
Advance Replacement	Same-day shipping for in-warranty router replacements***

*With current AirLink Complete subscription




**Full warranty terms are available at www.sierrawireless.com/end-user-warranty

***With current AirLink Premium subscription

ACCESSORIES	
In the box	MP70 , DC Power Cable and Quick Start Guide <ul style="list-style-type: none"> • AC Adapter (2000579) • I/O Cable (6001004) • OBD-II Y Cable (6001204) • J1939 Y Cable (6001192) • 6-in-1 Shark Fin (6001197) • 6-in-1 Dome Antenna (6001121) <i>See website for more antenna options</i>
DIMENSIONS	
	190mm x 45mm x 105mm (112mm including connectors) 7.5in x 1.75 in x 4.1 in (4.4 in including connectors) Weight: 0.76kg / 1.68 lb



AirLink MP70 – Router Dimensions Diagram

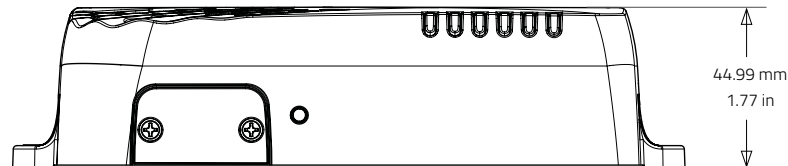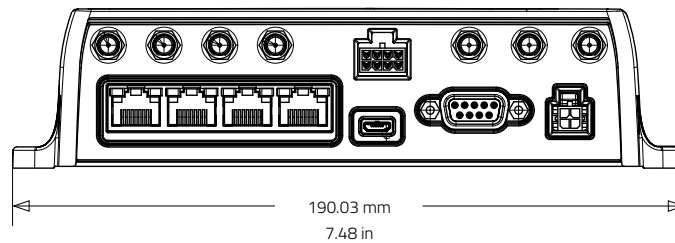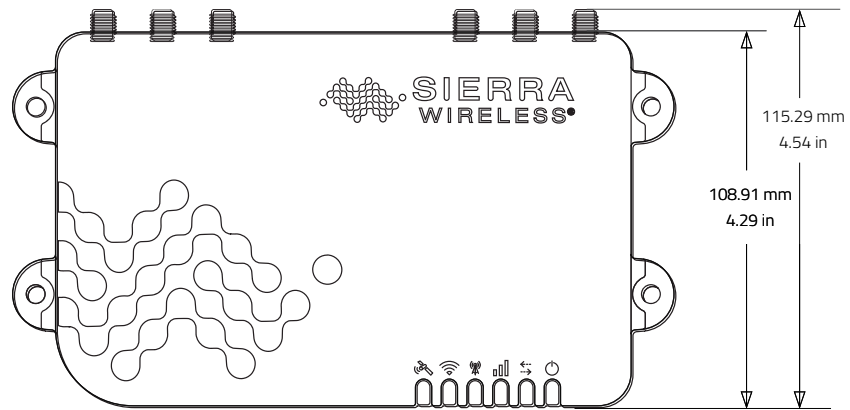

About Semtech

Semtech Corporation (Nasdaq: SMTC) is a high-performance semiconductor, IoT systems and cloud connectivity service provider dedicated to delivering high-quality technology solutions that enable a smarter, more connected and sustainable planet. Our global teams are committed to empowering solution architects and application developers to develop breakthrough products for the infrastructure, industrial and consumer markets.

To learn more about Semtech technology, visit us at [Semtech.com](https://www.semtech.com) or follow us on [LinkedIn](#) or [X](#).

"Semtech", "Sierra Wireless" and "AirLink" are registered trademarks of Semtech Corporation or its subsidiaries. Other product or service names mentioned herein may be the trademarks of their respective owners. © 2023 Sierra Wireless, Inc. © 2024 Semtech Corporation. All rights reserved. 2024.11.12